ROMA
INSULATION SYSTEMS

Trapez DUO 062

Trapezoidal profile with PIR anti-condensate coating

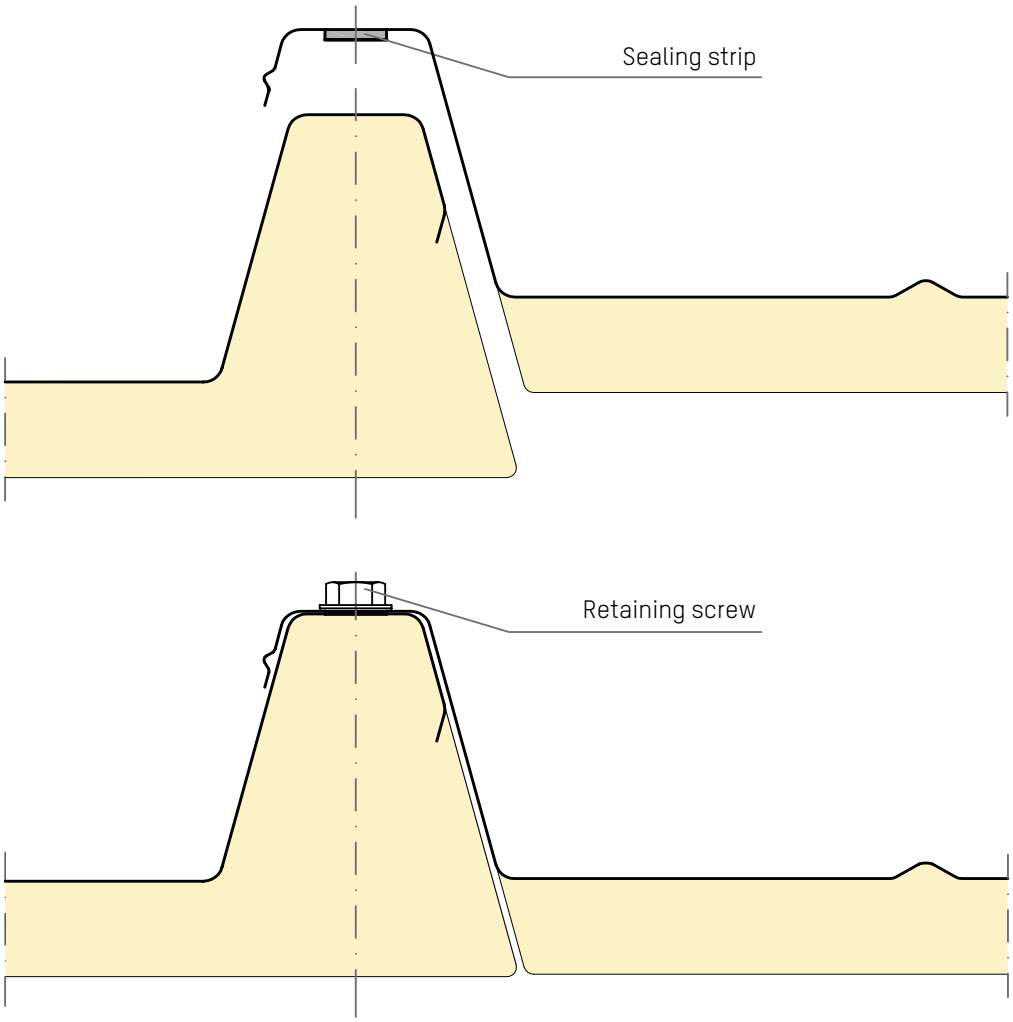

- Ideal for refurbishment and farm buildings
- With sealing strip in the overlapping bead
- Quick and easy assembly
- Recommended roof pitch min. 5% (≙ 3°)
- Module width 1,000mm
- Approx. 18 mm PIR coating with aluminium film coating
- Suitable for many applications

We recommend our wide range of ROMA roof panels type D and RD for heated buildings and areas with heavy foot traffic.

Trapez DUO 062
Trapezoidal profile with PIR anti-condensate coating

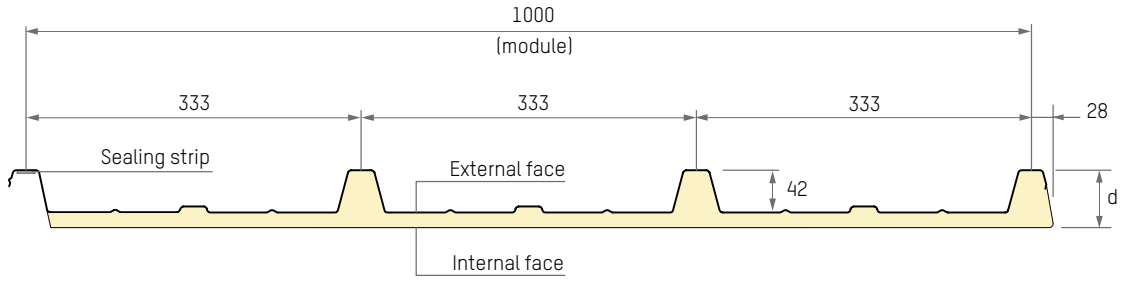

Cladding layers	External face: Galvanized sheet steel 0.6 mm and 0.75 mm with polyester coating in standard colors RAL 3009, 7016, 9002 or 9006. Special colors on request. Internal face: Perforated aluminum film 0.05 mm in stucco design with protective white paint and with visible imperfections.
Surface finishes	External face: trapezoidal profile; Internal face: smooth
Total thickness	Approx. 60 mm
Production length	Lengths up to 18,000 mm separating cut with inserted foil type R+L , 60-1,000 mm from 4,000 mm length possible
Module width	1,000 mm ±3 mm
Roof pitch	min. 5% (≙ 3°)
Fire classification	(EU) Euro class D-s2, d0 according to EN 13501-1
Weight	Approx. 7.4kg/m²
U-value acc. to EN 14509 with joint	1.048 W/(m²·K)
Corrosion protection	Corrosivity categories according to DIN 55634 : 2010-04 Appendix A: C2/H , C3/H, C4/L
Execution class	EXC2 according to table C.1 EN 1090-2
Statics	Calculation according to 1993-1-3

Caution! Only walk on steel trapezoidal profiles up to 0.6 mm during and after assembly after installation of pressure distribution plates.

Romakowski GmbH & Co. KG · Herdweg 31 · 86647 Buttenwiesen, Germany · Phone +49 (0) 8274.999-0 · Fax +49 (0) 8274.999-150
info@romakowski.com · www.romakowski.com